





G-Rail aluminium shower rail profiles 4100, 4200 & 5100.

Supplied with water resistant fittings as standard - G-Rail shower rails are manufactured in continuous lengths to suit all over-bath / shower-room applications.

#### Standard colours:

4100 : White Ral 9010, natural.

4200: White Ral 9010, natural, brown, gold, natural polished, gold polished.

5100: White Ral 9010, natural, brown, gold, natural polished, gold polished.


Special colours available on request.

SHOWER
RAIL SYSTEMS
# 4100, 4200, 5100

# 4100, 4200, 5100 shower



#### Installation

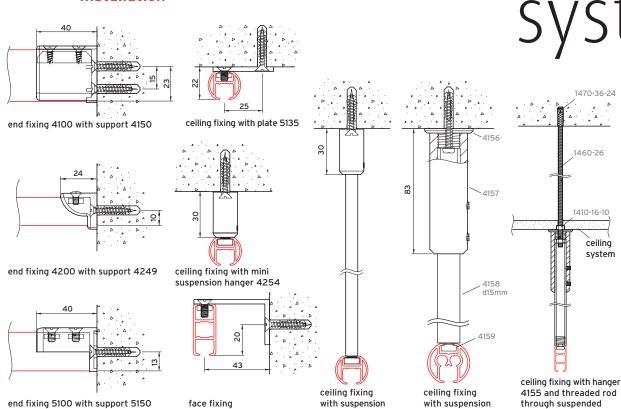

hanger 4255

hanger 4155


ceiling tiles


with wall bracket 4141




G-Standard (bracket fixing guide)


## 4100 394 gr/m 34






#### Specification Guide







#### 4100:

#### Material:

Aluminium 606035-T6-F22. (Higher specification than DIN 1725). Shape and size tolerances are in accordance with DIN 17615. White RAL 9010 powder coated in accordance with the Qualicoat standard. Natural silver anodised in accordance with the Qualanod standard. Special colours available on request. Profile weight 4100: 394 gr/m.

#### **Accessories:**

Glider-hook 4008 supplied at 10 per metre. Number of gliderhooks 4008 at standard curtain width of 120 cms: 8 pcs; at 180 cms 12 pcs and at 240 cms curtain width 16 pcs. Two endstops 4002 per length, dust cover 4145.

#### Installation:

Ceiling fixing with suspension hanger 4155 or 4255, mini suspension hanger 4254 or direct ceiling fixing with plate 4135.

Face fixing with wall bracket 4141 or end fixing with support 4150 Bracket distance (cm) according to G-Standard or the following table. light medium heavy (curtain)

4100 200 150 110

#### Bendina:

Minimum radius 20 cms. Bending machine 1015.

#### 4200, 5100:

#### Material:

Aluminium 606035-T6-F22. (Higher specification than DIN 1725). Shape and size tolerances are in accordance with DIN 17615. White RAL 9010 or brown BS08B29 powder coated in accordance with the Qualicoat standard. Natural silver and gold anodised in accordance with the Qualanod standard. Special colours on request. Profile weight 4200: 288 gr/m. Profile weight 5100: 522 gr/m.

#### Accessories:

Glider-hooks 4008 supplied at 10 per metre. Number of gliderhooks 4008 at standard curtain width of 120 cms 8 pcs; at 180 cms 12 pcs and at 240 cms curtain width 16 pcs. Two endstops 4002 per length, dust cover 4145.

#### Installation:

Ceiling fixing with suspension hanger 4155 or 4255, mini suspension hanger 4254 or direct ceiling fixing with plate 5135. Face fixing with wall bracket 5141 or end fixing with support 4249 (4200) or 5150 (5100).

Bracket distance (cm) according to G-Standard or the following table.

light medium heavy (curtain) 4200 100 80 60

5100 180 130 100

#### Bending:


Minimum radius 15 cm. Bending machine 1015.


#### Product example


ems.

rail

standard shower rail designs and suspension hanger positions









### **Components**

Product design and specification changes reserved.

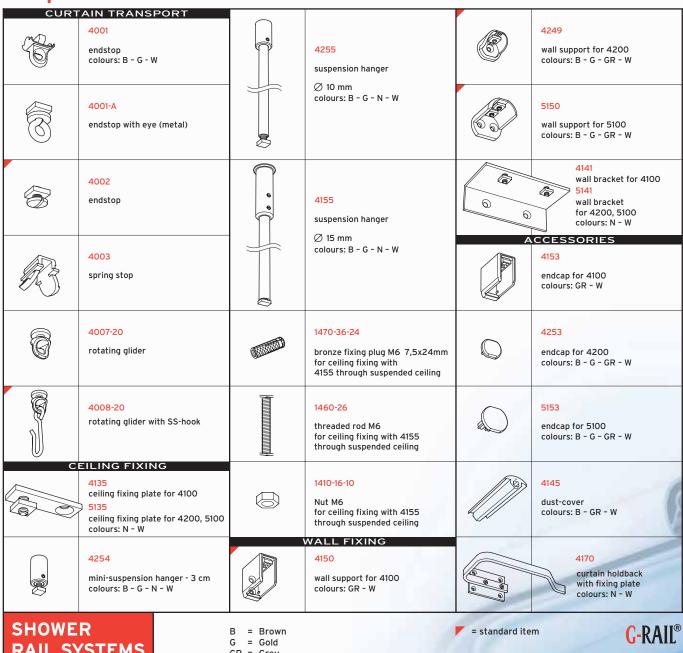

**RAIL SYSTEMS** # 4100, 4200, 5100

GR = Grey N = Natural = White









Space for dealer address 4200 5100