




- > 6200/6300/6500/6600/6700
- > standard power supplies
- > for operation using:
  - momentary switch
  - relay




1 x connector for 24V DC power plug

- > for 6200
- > for 6500
- > for 6700
- > 2,1 A

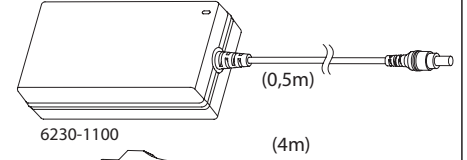


> also available in UK version


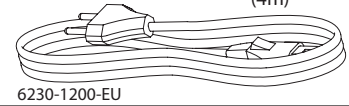


- > for 6300
- > for 6600
- > 0,8 A

> also available in UK version

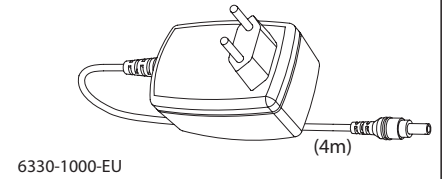

Connector for RJ45 plug (type B) connector 2 black

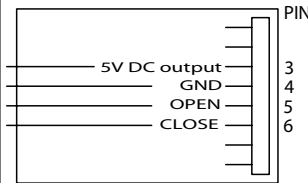

connect wires necessary only

LED/button

Switching

0	Open and close should not be activated simultaneously. If so, the motorunit will switch to the programming mode;	0	Bounce time lower than 0,04 sec required.
0	pulse < 1,2 sec: - automatic complete open/close - stop	0	The switching current is +/- 5,5mA;
0	pulse > 1,2 sec: the system runs untill button is released or when endposition is reached	0	24V out pin2 and pin4: max. 2,4VA
		0	Potential free switching only

